

BTA415DT

GENERATOR CHARACTERISTICS

PRIME

STANDBY

Power	kVA	375	413
Power	kW	300	330
Standart Voltage	V	400/230	400/230
Revolution Per Minute	r.p.m	1500	1500
Rated At Power Factor	Cos Phi	0,8	0,8


STANDBY POWER

Supplying of electrical power at variable load, in the event of normal utility power failure according to ISO85281.

This rating is maximum power, no overload capability is available.

PRIME POWER

Supplying of electrical power at variable load for an unlimited number of hours in the event of normal utility powerfailure according to ISO85281. 10% over load capability is available.

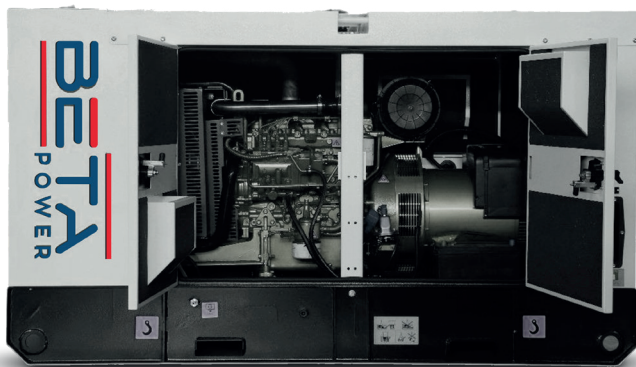

STANDART FEATURES

- 4 stroke 1500RPM, water cooled heavy duty diesel engine
- Dry type replacable air filter
- Heatresistant radiator for 50 °C
- Flexible oil pipes and oil draining valve
- Preheater 4 poles synchrontype, single bearing, brushless alternator
- Electrical wiring diagram User manual and operating manual
- Fuel tank housed in the chassis Industrial type silencer

- Electrostatic paint coated, steel, welded chassis
- Electronic battery charger
- Batteries and cables
- Protection system on manual run
- Lubrication oil and anti – freeze
- Soundproof canopy
- Circuit Breaker - Electronic ABB

BTA415DT

ENGINE CHARACTERISTICS

Manufacturer	DETROIT ENGINE
Model	WT13B-330D
Type	4
No. of cylinder	6
Displacement <i>lt</i>	12,53
Cooling System	Water Cooling
Bore x Stroke <i>mm</i>	131X155
Compression Ratio	
Aspiration	Turbocharged
Induction system	Electronic

ELECTRICAL SYSTEM

Electrical System	VDC	12
Starter		DC24V
Charge Alternator Current	A	540

FUEL SYSTEM

Lubricant Oil Capacity	<i>lt</i>	27
Fuel Consumption Under 100% Load	<i>lt/h</i>	73.2
Fuel Consumption Under 75% Load	<i>lt/h</i>	
Fuel Consumption Under 50% Load	<i>lt/h</i>	

COOLING SYSTEM

Coolant Capacity Standard	<i>lt</i>	26
Thermostat Coolant Alarm	°C	71-85
Temperatur	°C	105

EXHAUST SYSTEM

Max. Allowable Back Pressure		
Standard Exhaust	<i>mm</i>	100


ALTERNATOR CHARACTERISTICS

No Of Phases	3
Power Factor	0,8
No Of Bearings	Single
No Of Poles	4
No Of Leads	6-12
Insulation Class	H
Degree Of Protection	IP23
Excitation System	AVR

BTA415DT

CONTROL PANEL FEATURES


- Deepsea 7320
- Diesel and gas genset support
- 400Hz operation support
- 400 event logs full snapshot
- Multiple Automatic test program
- 3 level configuration password
- 128x64 graphical LCD display
- Downloadable language
- Waveform display of V&I
- Harmonic analysis of V&I
- Synchroscope & check synch 16Amp
- MCB & GCB outputs 8 configurable digital outputs
- Outputs expandable to 40 4 configurable analog outputs
- Battery charge run enabled
- Weekly Operation Schedule
- Dual mutual standby with equal aging of gensets
- Manual speed fine adjust some ECU's
- Automatic fuel pump control
- Disable protection feature
- Excess protection power
- Reverse power protection
- Overload IDMT protection
- Load shedding, dummy load
- Multiple load management
- Waveform display of V&I
- Battery backup real time clock Idle speed control
- All parameters front panel editable
- Multiple nominal conditions
- Contactor & MCB drive
- 4 quadrant genset power counters
- Mains power counters
- Fuel filling counter
- Fuel consumption counter
- Free configuration software
- Allow SMS controls
- Mobile genset support
- Automatic GSM geolocation
- GPS connectivity (USB & RS232)
- Modem & ethernet diagnostic
- Configurable through USB, RS485,
- Ethernet and GPRS
- Ready for central monitoring Ethernet and GPRS

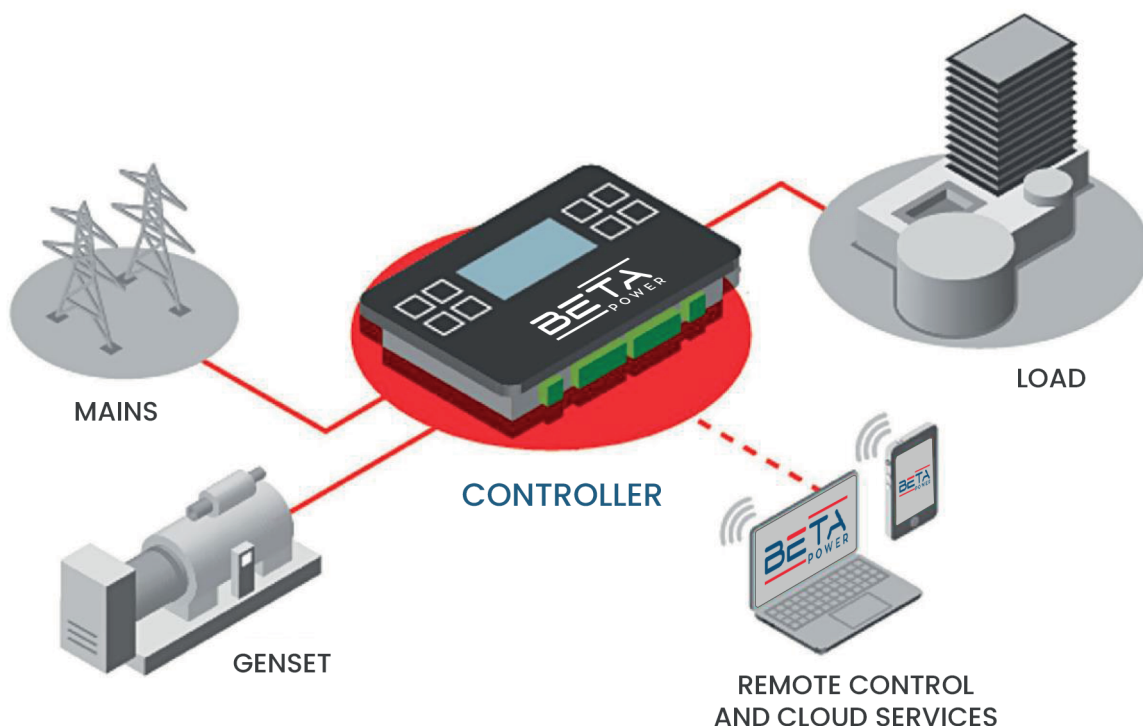

BTA415DT

OPEN TYPE DIMENSIONS

Length	mm	3200
Width	mm	1200
Height	mm	1850
Weight	kg	2950

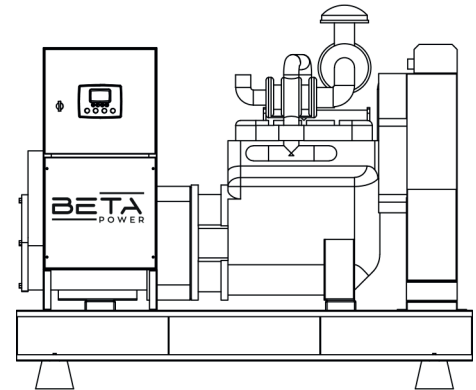

CANOPIED TYPE DIMENSIONS

Length	mm	4400
Width	mm	1400
Height	mm	2223
Weight	kg	4010
Base fuel tank volume (L)	l	650

